


A HARRIS AERIAL



H6 Electric

8 kg Max Payload • 48 Minute Flight Time • Foldable Design
3600 Meter Service Ceiling • Universal Payload Connector

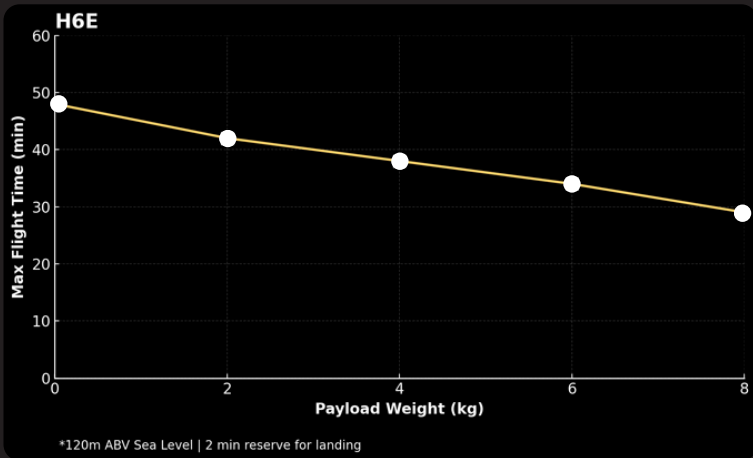

The Carrier H6 Electric is a long-duration, heavy-lift hexacopter powered by smart lithium polymer batteries. The H6 Electric platform offers payload versatility for a wide variety of mission profiles and durations. The H6 comes ready to plug-and-play to any of the three compatible power formats (batteries, H2400 EFI Generator, or Hydrogen FCPM) provided by Harris Aerial in just minutes.

The H6 electric is a field-proven system with many years of service across various industrial, commercial, and military applications.



GCS
OPTIONS




- Handheld
- 8" HD Display
- Touchscreen
- Real-Time Video
- Low Latency
- NDA Compliant

- 12 Channel Functionality
- Sunlight Viewable Display
- 2-AXIS Payload & Gimbal Controls
- 6-POS/3-POS/2-POS/Guarded
- Button/Rotary
- NDA Compliant

HARRISAERIAL.COM

INFO@HARRISAERIAL.COM | (407) 725-7886

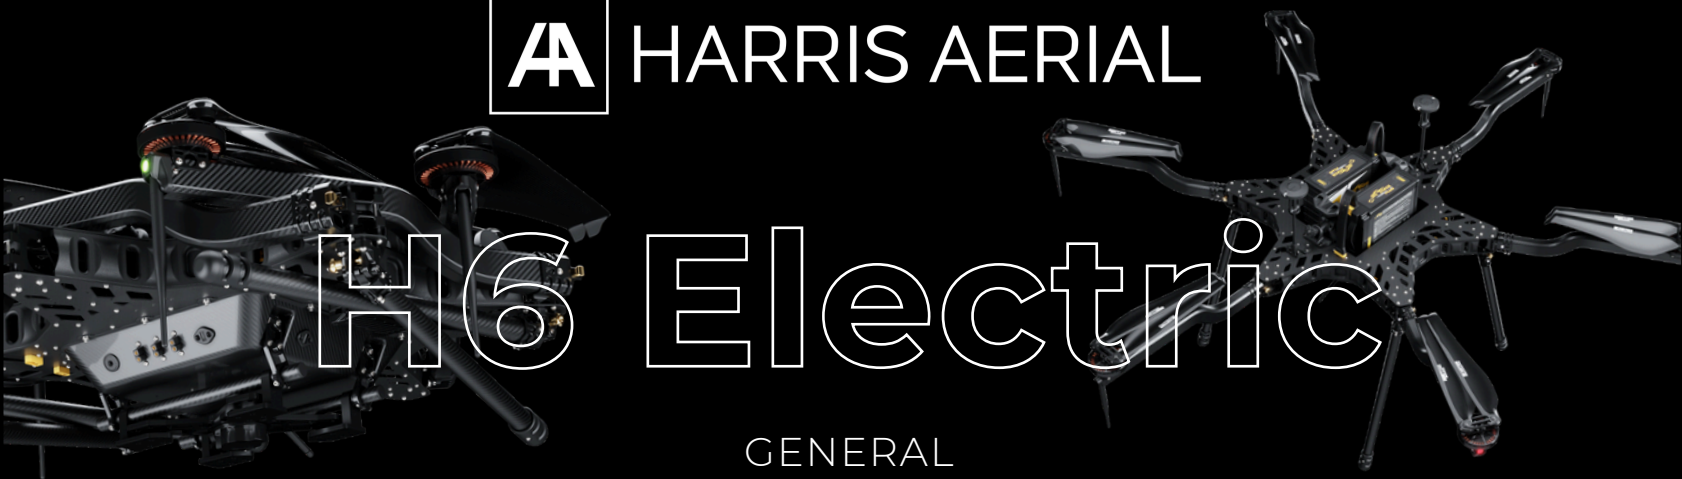

H6 Electric

GENERAL

Maximum Takeoff Weight	55 lbs 25 kg	Flight Modes	GPS LOITER ALTITUDE HOLD FULLY AUTONOMOUS
Empty Weight	21.5 lbs 9.8 kg	Radio Frequencies	2.4 GHz (ISM) 902-928 MHz
Max Payload	17.6 lbs 8 kg	System Architecture GPS	Open Source
Flight Time	48 min. (No Payload)		Dual RTK GNSS
Max Speed	33.6 mphver 15 m/s	Payload Mounting	Dampened Modular Quik-Release
Max Vertical Speed	5.6 mph 2.5 m/s	Weather Rating	(IP43)
Max Lean Angle	30 degrees	Flight Safety Systems	Radio and Battery Failsafes Triple Redundant IMU Parallel Battery Power
Dimensions (Unfolded)	Prop Tip to Tip: 2373 mm / 93.4" Height: 793 mm / 31.2"	Dimensions Transport Case	903mmx903mmx808 mm (35.5"x35.5"x31.8")

BATTERY

Battery Type	1251P Smart Lipo *2x Batteries)	Battery Capacity	32,000 mAh
Peak Battery Voltage	50.4 V	Battery Life Cycle	250 Flights
Nominal Battery Voltage	44.4 V	Battery Connector	AS150U-F(Anti-Spark)
Auxiliary Power	5.3 V, 12/14 V, 24/28 V, 48 Vbat Power Ports	Safety Features	Battery Voltage & Amperage Monitoring

OPERATIONAL & ENVIRONMENTAL

Operation Table	-20°C to 49°C -4°F to 120°F	Service Ceiling AMSL	12,000 ft 3658 m (Payload Dependant)
Max Operational Wind Speed	30 mph 13 m/s	Service Ceiling AGL	400 ft 122 m (FAA Limited)

HARRISAERIAL.COM

INFO@HARRISAERIAL.COM | (407) 725-7886