



CARRIER

H6 HYDRONE

Hydrogen-electric conversion produces clean DC power for extended silent flight — the endurance of a hybrid system with the near-silent operation of an all-electric multirotor.

**5 KG**
11 LBS

MAX PAYLOAD

180 MIN

MAX FLIGHT TIME

2.4 kW

FUEL CELL POWER

10.8 LH₂ CAPACITY**UNIVERSAL**

PAYLOAD CONNECTOR




CARRIER H6 **HYDRONE.**

The Carrier H6 Hydrone uses highly efficient hydrogen-electric conversion to produce clean DC power in a robust, lightweight package. It delivers extreme hybrid flight times while maintaining the nearly silent operation of an all-electric multirotor.

As part of the H6 family, it remains fully convertible to gas-electric or all-electric power formats in minutes — one airframe, three power systems.

PERFORMANCE **FLIGHT TIME VS. PAYLOAD**

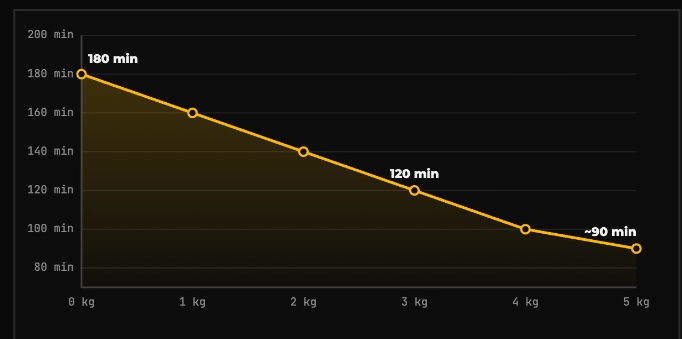

TESTED AT 120 M AGL • 2-MIN LANDING RESERVE • VARIES WITH ALTITUDE, TEMP & WIND

02 — CONFIGURATION HIGHLIGHTS

5 kg MAX PAYLOAD	180 min MAX FLIGHT TIME	2.4 kW FUEL CELL POWER	10.8 L H ₂ CAPACITY	Universal PAYLOAD CONNECTOR
----------------------------	-----------------------------------	----------------------------------	--	---------------------------------------

03 — GROUND CONTROL

GROUND CONTROL OPTIONS.

OPTION A • HANDHELD — COMMERCIAL & MILITARY

OPTION B • CONSOLE

		
C-NAVIGATOR COMMERCIAL RUGGED HANDHELD GCS 8" Samsung TAB 5 - IP65 - AES-256 / STIG - NDAA Compliant	C-SROC MILITARY / DEFENSE SOLDIER ROBOTIC CONTROLLER 8" Samsung TAB 5 Tactical Edition - MIL-STD-810-H · IP65 - Nett Warrior · AES-256 / STIG - NDAA Section 848	C-GCS CONSOLE PROFESSIONAL MISSION COMMAND 12-Channel Functionality - Sunlight-Viewable Display 2-Axis Payload & Gimbal - NDAA Compliant

■ ALL STATIONS • MAVLINK NATIVE • NDAA SECTION 848

SPECIFICATIONS
TECHNICAL SPECIFICATIONS.
A GENERATOR & POWERPLANT

GENERATOR	2.4 kW Fuel Cell Power Module	FUEL TYPE	Hydrogen Gas (H ₂)
CONTINUOUS POWER	2.4 kW	REFUELING	Pneumatic-Driven Gas Boosters
PEAK POWER	2.7 kW	BACKUP BATTERY	6S2P LiPo (5-min redundancy)
FUEL CYLINDER	10.8 L · 350-bar (Anti-Spark)		

B AIRFRAME & PERFORMANCE

FRAME TYPE	Hexacopter (Foldable)	MAX TAKEOFF WEIGHT	25 kg · 55 lbs
MAX HORIZONTAL SPEED	15 m/s · 33.6 mph	EMPTY WEIGHT (WITH FCPM)	14.5 kg · 32 lbs
MAX VERTICAL SPEED	2.5 m/s · 5.6 mph	DIMENSIONS (UNFOLDED)	Prop tip 2,373 mm · H 793 mm
MAX FLIGHT TIME	180 min (no payload)	TRANSPORT CASE (FOLDED)	903 × 903 × 808 mm
SERVICE CEILING	11,483 ft · 3,500 m AMSL	IP RATING	IP43
PROPELLERS	Carbon Fiber w/ Aluminum Hub	OPERATING TEMP	-5 °C to 42 °C · 23 °F to 108 °F

C COMMAND, CONTROL & SAFETY

FLIGHT CONTROLLER	Cube Orange+ (Custom ArduPilot)	FAILSAFES	Radio, Battery & H ₂
RADIO FREQUENCIES	2.4 GHz ISM · 902-928 MHz	GROUND CONTROL	C-GCS / C-NAV / C-SRoC / HereLink
DATA RANGE	Up to 20 km · 12.5 mi (Extended-Range Optional)	FLIGHT TRACKING	ADS-B Receiver
IMU REDUNDANCY	Triple Redundant IMU	TELEMETRY	Real-Time Voltage & Current
POWER REDUNDANCY	Dual Redundant FCPM	COMPLIANCE	NDAA Compliant (Section 848)

D PAYLOAD INTERFACE

MOUNT TYPE	Dampened Modular Quick-Release	PAYLOAD POWER OUT	5 V · 12 V · 24 V · 48 V Regulated
MOUNT COMPATIBILITY	Universal Payload Connector	DATA INTERFACE	UART / Ethernet / CAN / GPIO / USB
MAX PAYLOAD	5 kg · 11 lbs	COMPATIBLE PAYLOADS	LiDAR · Photogrammetry · Thermal/E0-IR · Multispectral · Custom
POWER SOURCE	Continuous FCPM Bus		



HARRIS AERIAL

CARRIER H6 HYDRONE

HYDRONE • PRODUCT BROCHURE

H6 HYDRONE.

— CONTACT

WEB

harrisaerial.com

EMAIL

info@harrisaerial.com

PHONE

(407) 725-7886